

Figure 1 is a perspective view of a hand tool, such as a hammer or mallet. The tool consists of a handle 4 and a head 2. The handle 4 has a trigger 6 and a finger loop 18. The head 2 has a blade 16 and a back edge 20. A component 14 is mounted on the head 2, with a spring 24 and a pin 15. Other components are labeled 8, 10, 12, and 15.



ARCHERY BOW WITH BOW SPEED SPECIFIC
SIGHT PIN BLOCK

Inventor: Henry M. Gahops Jr.

Application No. 09/648,887

Attorney Docket No.: BEA-246 (1405-305)

Contact: Charles J. Meyer (317) 634-3456

Drawing Sheet 2 of 5

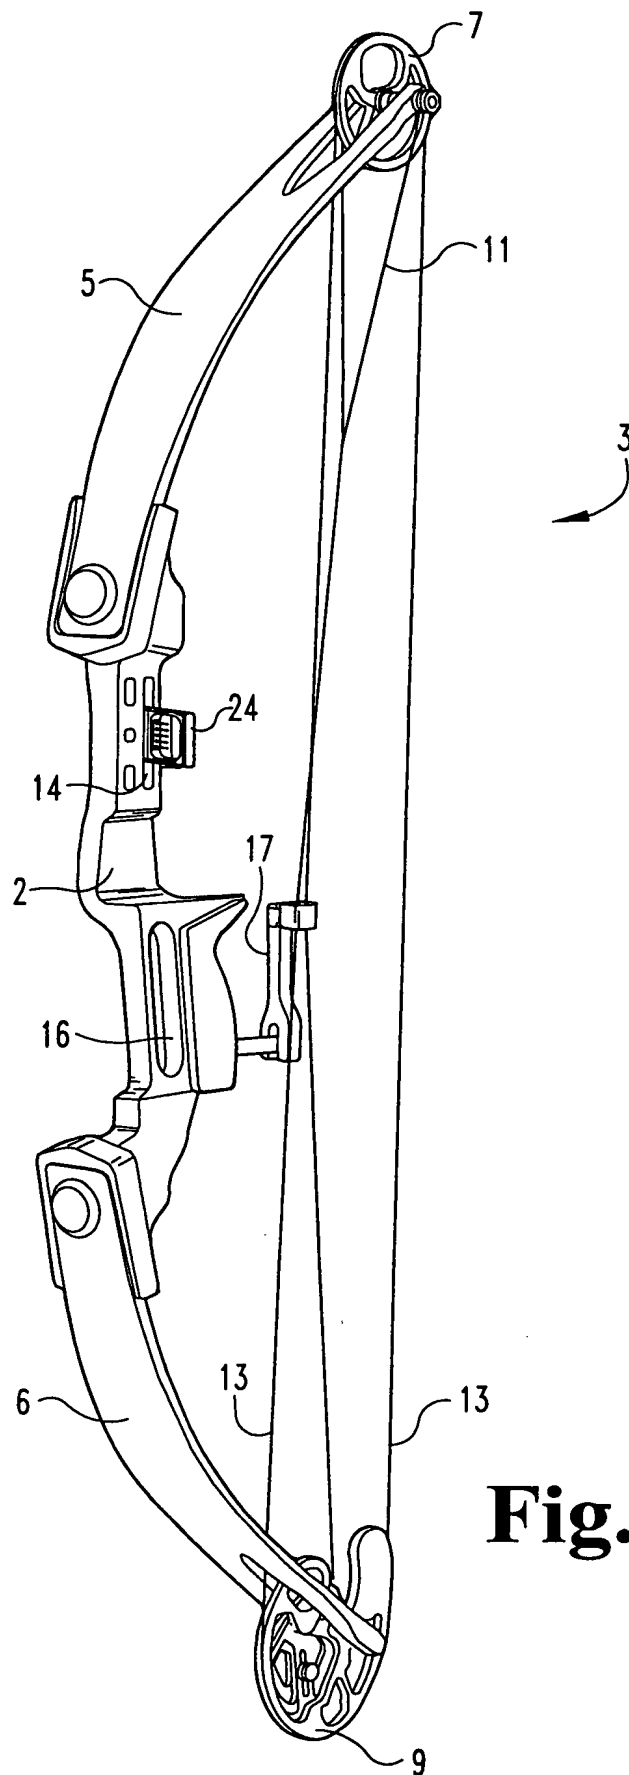


Fig. 2



**ARCHERY BOW WITH BOW SPEED SPECIFIC
SIGHT PIN BLOCK**

Inventor: Henry M. Gallops Jr.
Application No. 09/648,887
Attorney Docket No.: BEA-246 (1405-305)
Contact: Charles J. Meyer (317) 634-3456
Drawing Sheet 3 of 5

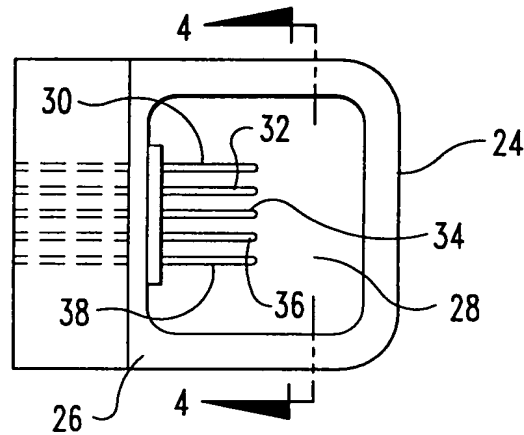


Fig. 3




Fig 4



**CHERRY BOW WITH BOW SPEED SPECIFIC
SIGHT PIN BLOCK.**

Inventor: Henry M. Gallops Jr.

Application No. 09/648,887

Attorney Docket No.: BEA-246 (1405-305)

Contact: Charles J. Meyer (317) 634-3456

Drawing Sheet 4 of 5

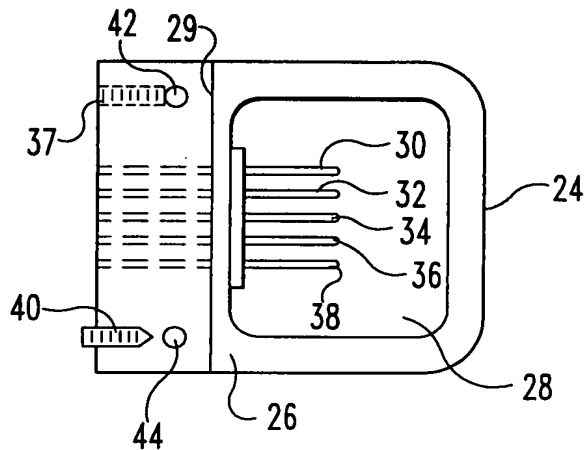


Fig. 5

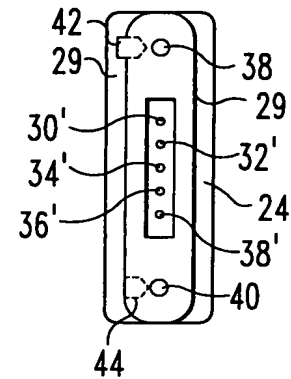


Fig. 6




Fig. 7A

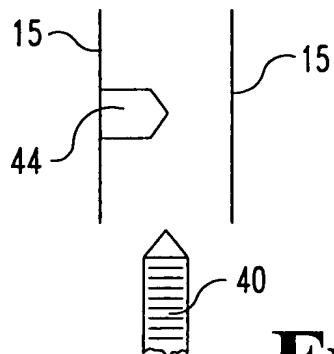


Fig 7B

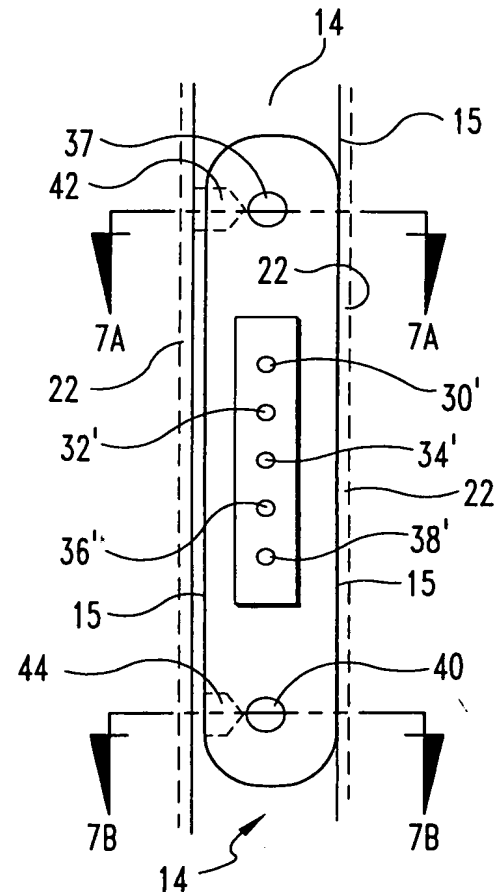


Fig. 7



AF NERY BOW WITH BOW SPEED SPECIFIC
SIGHT PIN BLOCK

Inventor: Henry M. Gallops Jr.

Application No. 09/648,887

Attorney Docket No.: BEA-246 (1405-305)

Contact: Charles J. Meyer (317) 634-3456

Drawing Sheet 5 of 5

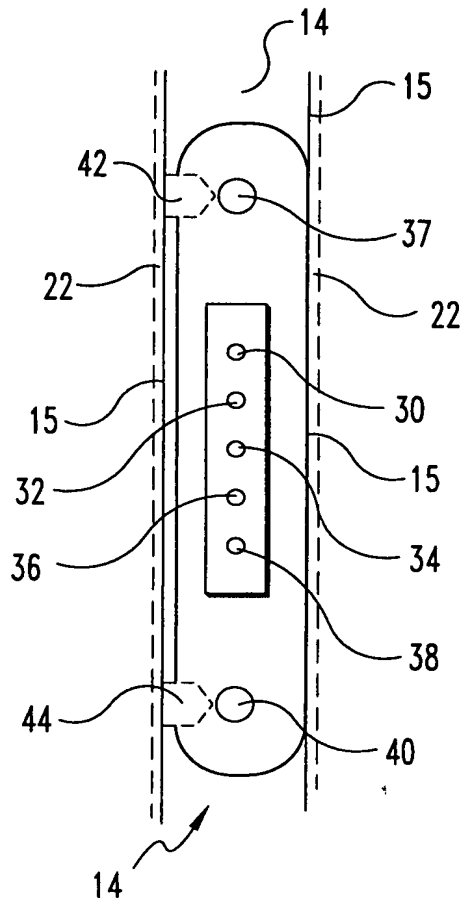


Fig. 8